


ceg



MXP Series



Description:

The MXP series of horizontal multi-stage close coupled pumps fitted with an autoflow are ideal where a flooded suction is present.

The design helps against run dry with the suction port above the pump shaft axis. The water filled shroud around the stages reduces noise from the pump.

The series comes complete with autoflow controller, pump and motor. The system gives the benefit of run dry protection.

Applications:

- Household Pressure Systems
- Irrigation
- Beach Houses
- Sprinklers and Garden Irrigation

Construction:


- Pump Casing: AISI 304 Stainless Steel
- Motor Casing: Aluminium
- Mechanical Seal: Single ceramic/carbon seal
- Impeller: Noryl

Performance Limits:

- Max suction lift: 6 Meters
- Max liquid temp: 40°C
- Max pressure: 8 Bar

Motor:

- Insulation class: F
 - Power supply : Single Phase 230V 50Hz
- Built-in thermal overload protection on single-phase models.

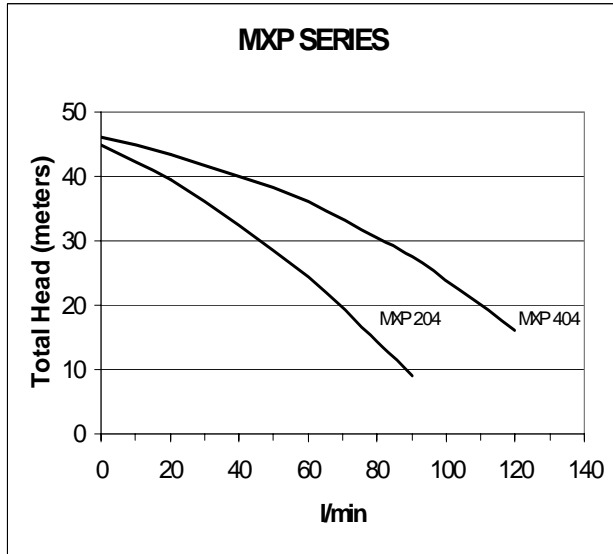

Model	Power KW	Inlet mm	Discharge mm	Single F.L.C	Three F.L.C	Weight Kg's
MXP204	0.55	25	25	2.8	-	10.6
MXP404	0.75	25	25	3.5	-	11.5