

## MXP Series



### Description:

The MXP series of horizontal multi-stage close coupled pumps are constructed in stainless steel with motor housing in aluminium.

### Applications:

- Household Pressure Systems
- Irrigation
- Beach Houses
- Sprinklers and Garden Irrigation

### Construction:


- Pump Casing: AISI 304 Stainless Steel
- Motor Casing: Aluminium
- Mechanical Seal: Single ceramic/carbon seal
- Impeller: Noryl
- Diffuser: Noryl
- Stage Casing: Noryl

### Performance Limits:

- Max suction lift: 6 Meters
- Max liquid temp: 40°C
- Max pressure: 8 Bar

### Motor:

- Insulation class: F
  - Power supply : Single Phase 230V 50Hz
- Built-in thermal overload protection on single-phase models.

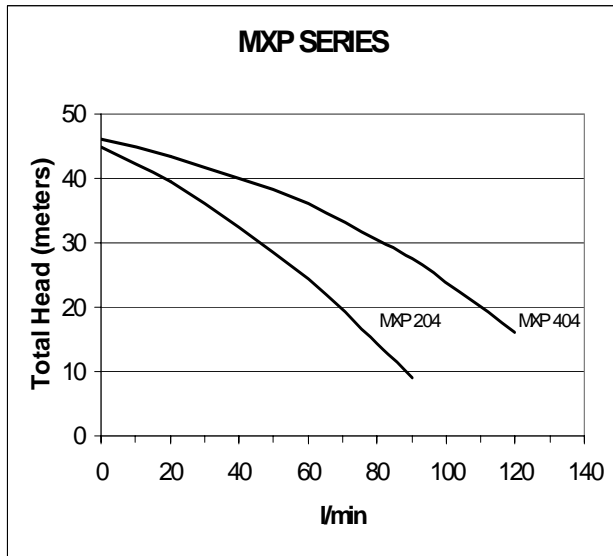

Model	Power KW	Inlet mm	Discharge mm	Single F.L.C	Three F.L.C	Weight Kg's
MXP204	0.55	25	25	2.8	-	10.6
MXP404	0.75	25	25	3.5	-	11.5