


ceg



AGA/M300A Series



Description:

The AGA/M300A series of self priming shallow well jet pumps have been built big and tough. The pump is constructed in heavy duty cast iron with motor housing in aluminium.

Applications:

- Farm Reticulation
- Irrigation
- Sprinklers and Garden Irrigation
- General Transfer

Construction:

- Pump Casing: G20 Cast Iron
- Motor Casing: Aluminium
- Mechanical Seal: Single ceramic/carbon seal
- Impeller: Brass


Performance Limits:

- Max suction lift: 8-9 Meters
- Max liquid temp: 50°C
- Max pressure: 8 Bar

Motor:

- Insulation class: F
- Power supply : Single Phase 230V 50Hz
Three Phase 230/415V 50Hz

Built-in thermal overload protection on single-phase models. Thermal protection for 3 phase to be provided by customer.

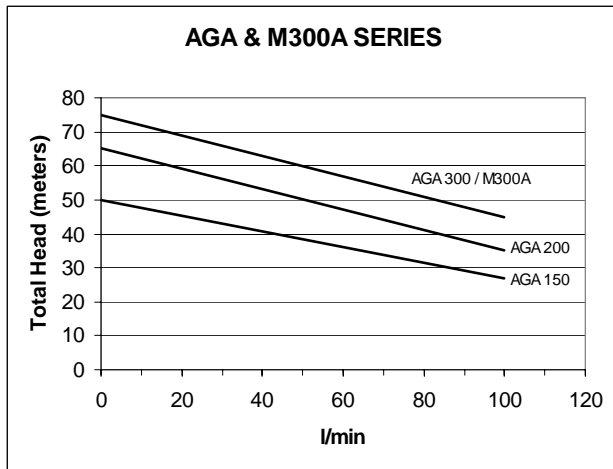

Model	Power KW	Inlet mm	Discharge mm	Single F.L.C	Three F.L.C	Weight Kg's
AGA150	1.1	40	25	8.5	3.2	26
AGA200	1.5	40	25	10.2	3.8	27
AGA300	2.2	40	25	-	4.9	28
M300A	2.2	40	32	13.8	-	29