

M94-97-99 Series



Description:

The M series of self priming shallow well jet pumps are constructed from stainless steel with motor housing in aluminium.

Applications:

- Household Pressure Systems
- Irrigation
- Beach Houses
- Sprinklers and Garden Irrigation

Construction:

- Pump Casing: AISI 304 Stainless Steel
- Motor Casing: Aluminium
- Mechanical Seal: Single ceramic/carbon seal
- Impellers: Noryl


Performance Limits:

- Max suction lift: 8-9 Meters
- Max liquid temp: 50°C
- Max pressure: 8 Bar

Motor:

- Insulation class: F
- Power supply : Single Phase 230V 50Hz
Three Phase 230/415V 50Hz

Built-in thermal overload protection on single-phase models. Thermal protection for 3 phase to be provided by customer.

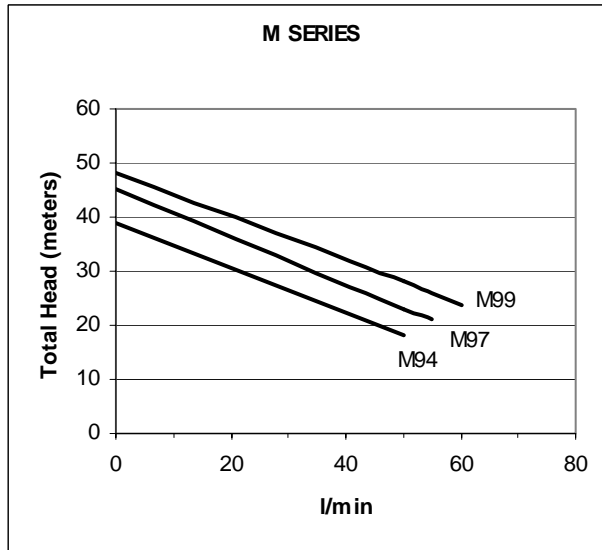

Model	Power KW	Inlet mm	Discharge mm	Single F.L.C	Three F.L.C	Weight Kg's
M94	0.37	25	25	3.6	-	7.8
M97	0.55	25	25	4.1	-	8.5
M99	0.75	25	25	6.2	2.5	9.3