


# ceg



## TOX Series



### Description:

The TOX is completely constructed in stainless steel with a open impeller. Complete with float switch for automatic operations.

### Applications:

- Emptying of ground water traps
- Emptying of semi dirty sump waters
- Emergency pumping out of cellars and garages
- General Industrial use

### Construction:

- Pump Casing: AISI 304 Stainless Steel
- Mechanical Seal: Ceramic/graphite seal
- Impeller: AISI 304 Stainless Steel
- Float : Plastic


### Performance Limits:

- Cloudy Water Pump
- Max liquid temp: 55°C
- Max Immersion: 10m
- Max solid: 10mm

### Motor:

- Insulation class: F
- Protection: IP68
- Power supply : Single Phase 230V 50Hz
- Lead: 5m with 3 pin plug

Built-in thermal overload protection with automatic reset on single-phase models.

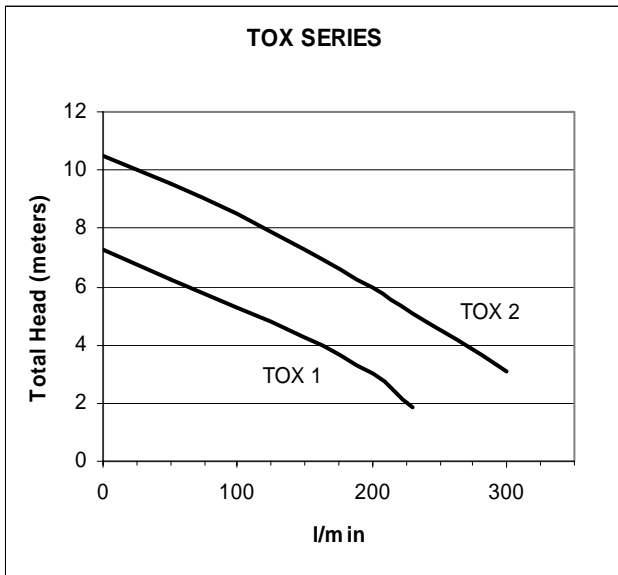

Model	Power KW	Discharge mm	Height mm	Diameter	Single F.L.C	Three F.L.C	Cable mm <sup>2</sup> x M	Weight Kg's
TOX 1	0.22	32	270	142	2.0	-	1.0 x 5.0	6.0
TOX 2	0.55	32	320	142	3.5	-	1.0 x 5.0	8.5