


ceg



M94-97-99 Series



Description:

The M series of self priming Autoflow Systems are ideal for any size dwelling, from the smallest batch to large double storey houses with multiple bathrooms. The design allows for suction from bores, 5000-gallon tanks, streams, rivers or other water sources.

With the pump being constructed from stainless steel this series is ideal for pumping harsh water. The series comes complete with Autoflow controller, pump and motor. The system gives the benefit of dry run protection.

Applications:

- Household Pressure Systems
- Irrigation
- Beach Houses
- Sprinklers and Garden Irrigation

Construction:

- Pump Casing: AISI 304 Stainless Steel
- Motor Casing: Aluminium
- Mechanical Seal: Single ceramic/carbon seal
- Impellers: Noryl


Performance Limits:

- Max suction lift: 8-9 Meters
- Max liquid temp: 50°C
- Max pressure: 8 Bar

Motor:

- Insulation class: F
- Power supply : Single Phase 230V 50Hz
Three Phase 230/415V 50Hz

Built-in thermal overload protection on single-phase models.

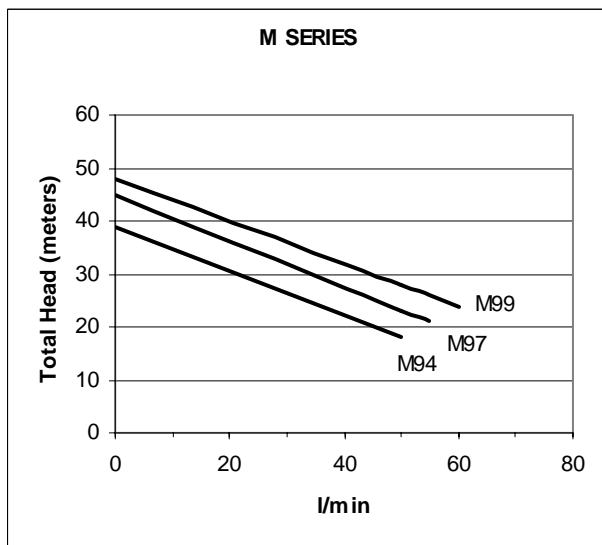

Model	Power KW	Inlet mm	Discharge mm	Single F.L.C	Three F.L.C	Weight Kg's
M94	0.37	25	25	3.6	-	7.8
M97	0.55	25	25	4.1	-	8.5
M99	0.75	25	25	6.2	2.5	9.3